

No. of Contacts	DIMENSIONS	
	A	B
4	2.54	5.58
6	5.08	8.12
8	7.62	10.66
10	10.16	13.20
12	12.70	15.74
14	15.24	18.28
16	17.78	20.82
18	20.32	23.36
20	22.86	25.90
22	25.40	28.44
24	27.94	30.98
26	30.48	33.52
28	33.02	36.06
30	35.56	38.60
32	38.10	41.14
34	40.64	43.68
36	43.18	46.22
38	45.72	48.76
40	48.26	51.30
42	50.80	53.84
44	53.34	56.38

PHAZ-XX-X-025

Number of Contacts


Contact Plating




Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
◎ Standard: B	
◎ Prefix "V" means lead free plating.	

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contacts resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ◎ Standard: P.P.S
 Finish: Gold plated
 ◎ Standard: Gold flash all over

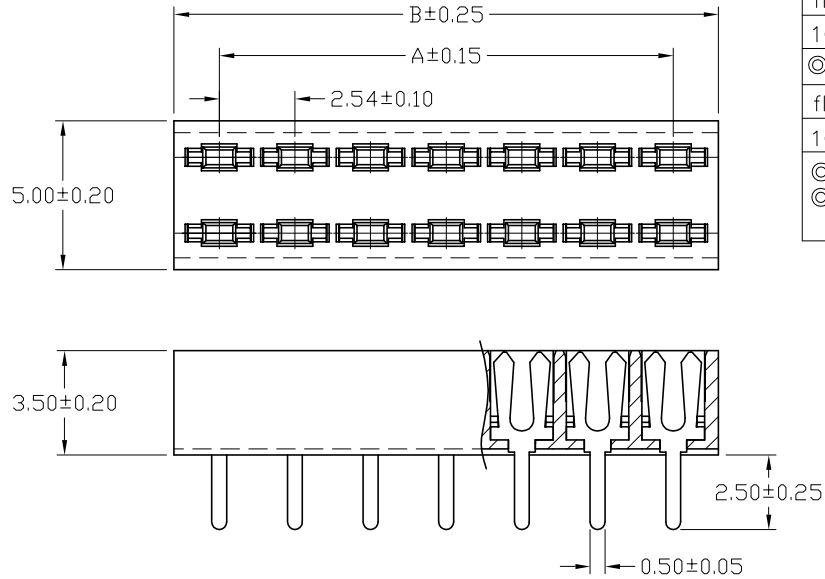

Recommended P.C.Board Hole Layout

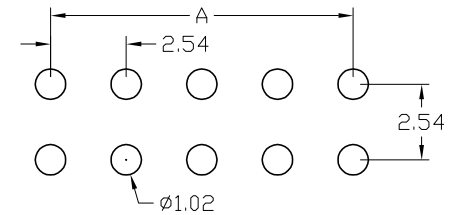

Rev.	ECN Number	Description	Drawn	Date
2	EC2-540037	新增電鍍選項	陳賜農	04/07'05



GENERAL TOLERANCE	SCALE 1=1	ORIGINAL DRAWN 江坤容	DATE 04/03'04	DWG. NO. X-XX	TITLE	REV. 2
XX. ± 0.50	UNIT MM	CHECK 林錫錦	DATE 04/07'05	F:\DWG\CDWG\PHA\PHAZ0A.DWG	成品規格圖	SHEET
X. ± 0.30	SIZE A4/X	APPROVE 林錫錦	DATE 04/07'05	PARTS NO. PHAZ-XX-X-025		1/1
.X ± 0.25						
.XX ± 0.20						