

No. of Contacts	DIMENSIONS	
	A	B
6	2.54	6.81
8	3.81	8.08
10	5.08	9.35
12	6.35	10.62
14	7.62	11.89
16	8.89	13.16
18	10.16	14.43
20	11.43	15.70
22	12.70	16.97
24	13.97	18.24
26	15.24	19.51
28	16.51	20.78
30	17.78	22.05
32	19.05	23.32
34	20.32	24.59
36	21.59	25.86
38	22.86	27.13
40	24.13	28.40
42	25.40	29.67
44	26.67	30.94
46	27.94	32.21
48	29.21	33.48
50	30.48	34.75
52	31.75	36.02
54	33.02	37.29
56	34.29	38.56
58	35.56	39.83
60	36.83	41.10
62	38.10	42.37
64	39.37	43.64
66	40.64	44.91
68	41.91	46.18
70	43.18	47.45
72	44.45	48.72
74	45.72	49.99
76	46.99	51.26
78	48.26	52.53
80	49.53	53.80
82	50.80	55.07
84	52.07	56.34
86	53.34	57.61
88	54.61	58.88
90	55.88	60.15
92	57.15	61.42
94	58.42	62.69
96	59.69	63.96
98	60.96	65.23
100	62.23	66.50

POSA-XXR-X-024

Pin type
 Brass
 Brass(Reel)
 Phosphor Bronze
 ©Standard: L

Pin Length mm
 Contact Plating





Definition	Code
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
©Standard: B	

Number of Contacts
 Right Angle

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic,UL 94V-0

Finish: Gold plated
 ©Standard: Gold flash all over

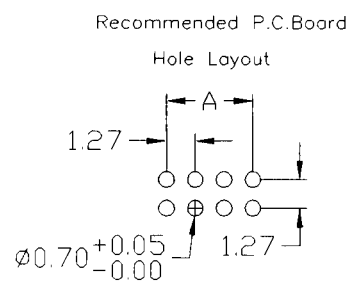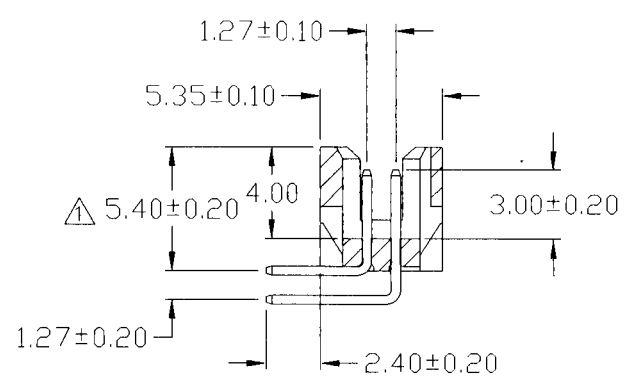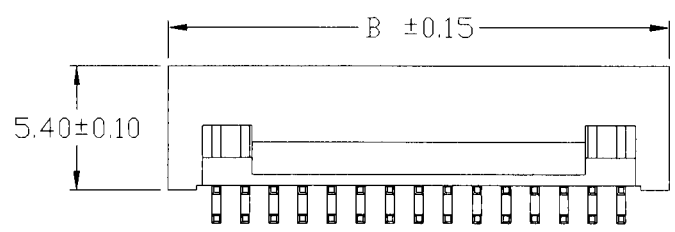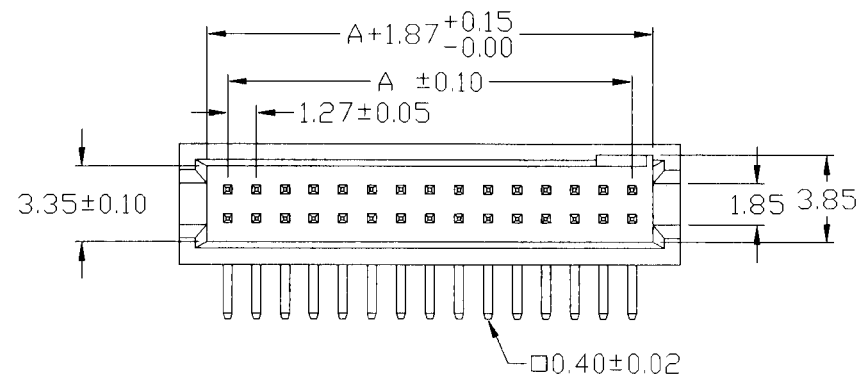

標準規格

△ 5.91±0.20	VERSION	5.40±0.20	15-03-02
-------------	---------	-----------	----------

PLASTREN
 Plastron Precision Co., Ltd.
 偉翔精密股份有限公司

GENERAL TOLERANCE	
XX. ±	XXX. ±
X. ±	.XXX ±
.X ±	.X* ±
.XX ±	.X* ±

SCALE	3=1
UNIT	MM
SIZE	A4

DRAWN 江坤容
 CHECK 李杰峰
 APPROVE 江坤容

DATE 15-03-02
 DATE 18-03-02
 DATE 18-03-02

DWG. NO.
 F:\DWG\CDWG\POSA\POSAR0E.DWG
 PARTS NO.
 POSA-XXR-X-024

TITLE
 成品規格圖

REV.
 1.1
 SHEET
 1/2