

XPST-XXS-X-030

Pin type	L	B	P
Brass			
Brass(Reel)			
Phosphor Bronze			
Standard: L			

Contact Plating



Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
◎ Standard: B	

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Contact resistance: 20 Megohms Max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Phosphor Bronze.
 Insulator Material: Thermoplastic, UL 94V-0
 Color : Black
 Finish: Tin, Gold or Duplex plated
 ◎ Standard: Gold flash all over
 ◎ Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

Recommended P.C.Board Hole Layout

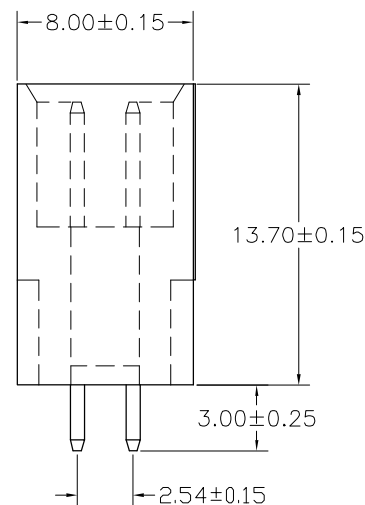

	A	B	REMARK (備註)
10	10.16	19.30	⊕
20	22.86	32.00	⊕

△ XPST-XXS-XXX-3.00	VERSION	XPST-XXS-X-030	23-05-02'
△ 新增 MARK	VERSION	如圖所示	16-09-03'

標準規格

<p>Plastron Precision Co., Ltd. 緯翔精密股份有限公司</p>	GENERAL TOLERANCE		SCALE 3=1	DRAWN 邱若婷	DATE 03'/09/16	DWG. NO.	TITLE	REV.
	XX. ±	XXX. ±	UNIT MM	CHECK 江坤容	DATE 03'/09/16	F:\DWG\CDWG\PST\PSTS0A.DWG	成品規格圖	1.2
	X. ±	.XXX ±	SIZE A4	APPROVE 陳俊任	DATE 03'/09/16	PARTS NO.		SHEET
	.X ±	X. ±				XPST-XXS-X-030	1/1	