
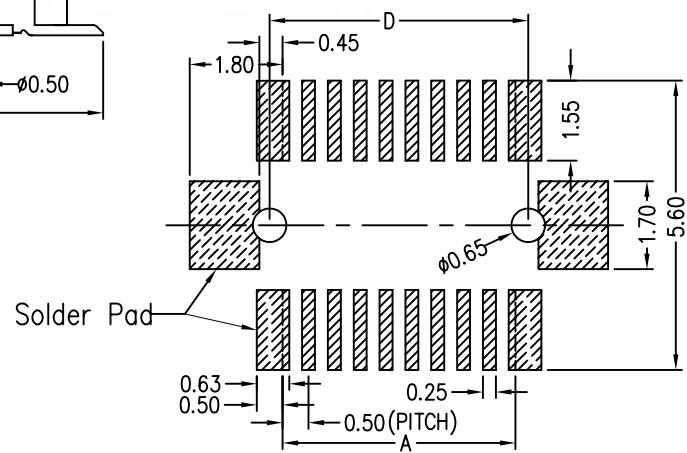
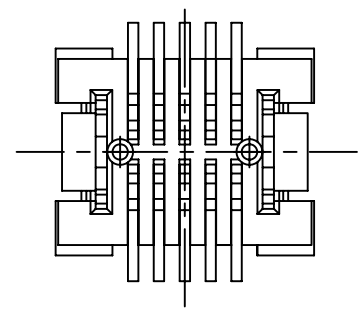
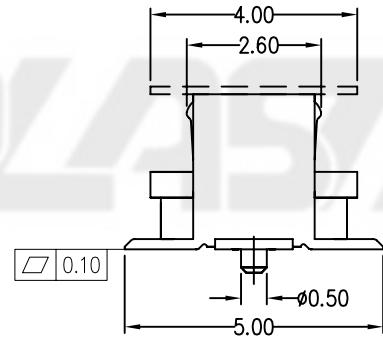
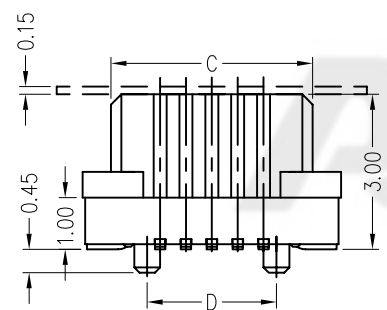


| CIRCUITS | DIM A | DIM B | DIM C | DIM D |
|----------|-------|-------|-------|-------|
| 10 | 2.00 | 5.00 | 3.90 | 2.50 |
| 12 | 2.50 | 5.50 | 4.40 | 3.00 |
| 14 | 3.00 | 6.00 | 4.90 | 3.50 |
| 16 | 3.50 | 6.50 | 5.40 | 4.00 |
| 18 | 4.00 | 7.00 | 5.90 | 4.50 |
| 20 | 4.50 | 7.50 | 6.40 | 5.00 |
| 22 | 5.00 | 8.00 | 6.90 | 5.50 |
| 24 | 5.50 | 8.50 | 7.40 | 6.00 |
| 26 | 6.00 | 9.00 | 7.90 | 6.50 |
| 28 | 6.50 | 9.50 | 8.40 | 7.00 |
| 30 | 7.00 | 10.00 | 8.90 | 7.50 |
| 32 | 7.50 | 10.50 | 9.40 | 8.00 |
| 34 | 8.00 | 11.00 | 9.90 | 8.50 |
| 36 | 8.50 | 11.50 | 10.40 | 9.00 |
| 38 | 9.00 | 12.00 | 10.90 | 9.50 |
| 40 | 9.50 | 12.50 | 11.40 | 10.00 |
| 42 | 10.00 | 13.00 | 11.90 | 10.50 |
| 44 | 10.50 | 13.50 | 12.40 | 11.00 |
| 46 | 11.00 | 14.00 | 12.90 | 11.50 |
| 48 | 11.50 | 14.50 | 13.40 | 12.00 |
| 50 | 12.00 | 15.00 | 13.90 | 12.50 |
| 52 | 12.50 | 15.50 | 14.40 | 13.00 |
| 54 | 13.00 | 16.00 | 14.90 | 13.50 |
| 56 | 13.50 | 16.50 | 15.40 | 14.00 |
| 58 | 14.00 | 17.00 | 15.90 | 14.50 |
| 60 | 14.50 | 17.50 | 16.40 | 15.00 |
| 62 | 15.00 | 18.00 | 16.90 | 15.50 |
| 64 | 15.50 | 18.50 | 17.40 | 16.00 |
| 66 | 16.00 | 19.00 | 17.90 | 16.50 |
| 68 | 16.50 | 19.50 | 18.40 | 17.00 |
| 70 | 17.00 | 20.00 | 18.90 | 17.50 |
| 72 | 17.50 | 20.50 | 19.40 | 18.00 |
| 74 | 18.00 | 21.00 | 19.90 | 18.50 |
| 76 | 18.50 | 21.50 | 20.40 | 19.00 |
| 78 | 19.00 | 22.00 | 20.90 | 19.50 |
| 80 | 19.50 | 22.50 | 21.40 | 20.00 |
| 82 | 20.00 | 23.00 | 21.90 | 20.50 |
| 84 | 20.50 | 23.50 | 22.40 | 21.00 |
| 86 | 21.00 | 24.00 | 22.90 | 21.50 |
| 88 | 21.50 | 24.50 | 23.40 | 22.00 |
| 90 | 22.00 | 25.00 | 23.90 | 22.50 |
| 92 | 22.50 | 25.50 | 24.40 | 23.00 |
| 94 | 23.00 | 26.00 | 24.90 | 23.50 |
| 96 | 23.50 | 26.50 | 25.40 | 24.00 |
| 98 | 24.00 | 27.00 | 25.90 | 24.50 |
| 100 | 24.50 | 27.50 | 26.40 | 25.00 |
| 120 | 29.50 | 32.50 | 31.40 | 30.00 |
| 140 | 34.50 | 37.50 | 36.40 | 35.00 |

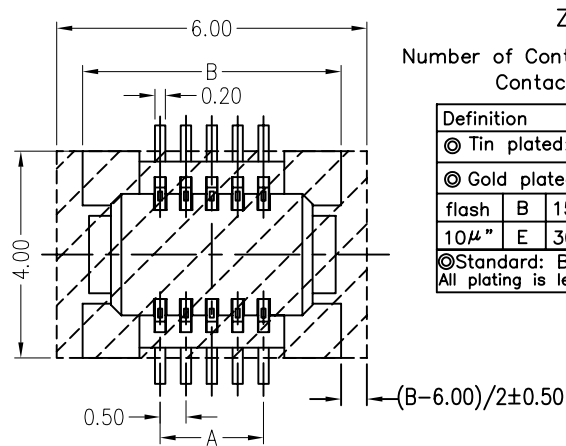

ZVE-XXS4-X-X-X-*

Number of Contacts
Contact Plating

| Definition | Code |
|---------------------------|------|
| ◎ Tin plated: | A |
| ◎ Gold plated: | |
| flash B 15μ" F | |
| 10μ" E 30μ" J | |
| ◎Standard: B | |
| All plating is lead free. | |

NULL: TUBE
K: REEL
C: FILM+REEL
F: FILM+TUBE

Null: With Halogen
H: Halogen Free

0:W/O Locating peg
1:With Locating peg

| Rev. | ECN Number | Description | Drawn |
|------|------------|-------------|-------------------|
| 10 | CH10080171 | 增加無鹵編碼 | TINA.LUO_08/27'10 |

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- CONTACT RETENTION FORCE: 200g MIN. PER CONTACT.
 - CURRENT RATING: 0.5 AMPERE.
 - CONTACT RESISTANCE: 40 m ohms MAX. FOR INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
 - INSULATION RESISTANCE: 100 M ohms MIN..
 - DIM. MARKED ①②③ SHOULD BE CONTROLLED BY QC
 - HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
 - PRODUCT NUMBER MATRIX:



| GENERAL TOLERANCE | | SCALE | ORIGINAL DRAWN | DATE | DWG. NO. | TITLE | REV. |
|-------------------|-----------|-------|----------------|----------|-------------------------|------------------|-------|
| XX. ± | XXX. ± | N/A | JUNO.CHEN | 08/27'10 | 600-0000-0865 | CUSTOMER_DRAWING | 10 |
| X. ± 0.15 | .XXX ± | UNIT | LANE.SUN | 09/28'10 | PARTS NO.(INTENDED USE) | | SHEET |
| .X ± 0.25 | X.* ± 3° | MM | LISS.XIANG | 09/28'10 | | | |
| .XX ± 0.20 | .X.* ± 2° | SIZE | | | ZVE-XXS4-X-X-X-* | | 1/4 |