


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.54	5.24	○
6	5.08	7.78	○
8	7.62	10.32	○
10	10.16	12.86	○
12	12.70	15.40	○
14	15.24	17.94	○
16	17.78	20.48	○
18	20.32	23.02	○
20	22.86	25.56	○
22	25.40	28.10	○
24	27.94	30.64	○
26	30.48	33.18	○
28	33.02	35.72	○
30	35.56	38.26	○
32	38.10	40.80	○
34	40.64	43.34	○
36	43.18	45.88	○
38	45.72	48.42	○
40	48.26	50.96	○
42	50.80	53.50	○
44	53.34	56.04	○
46	55.88	58.58	○
48	58.42	61.12	○
50	60.96	63.66	○
52	63.50	66.20	○
54	66.04	68.74	○
56	68.58	71.28	○
58	71.12	73.82	○
60	73.66	76.36	○
62	76.20	78.90	○
64	78.74	81.44	○
66	81.28	83.98	○
68	83.82	86.52	○
70	86.36	89.06	○
72	88.90	91.60	○
74	91.44	94.14	○
76	93.98	96.68	○
78	96.52	99.22	○
80	99.06	101.76	○

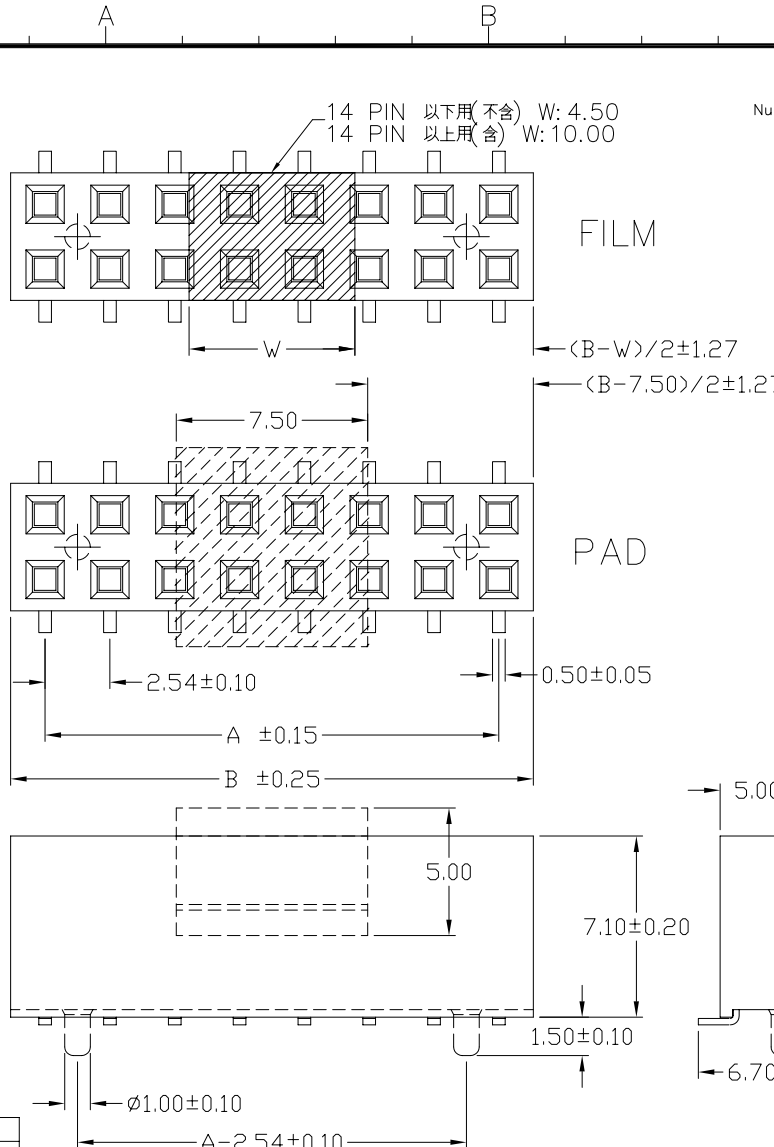

SPGFZ-XXS-X-X-* TUBE(W/O PAD FILM)
 P:PAD+TUBE
 R:PAD+REEL
 R1:PAD+REEL
 C:FILM+REEL
 F:FILM+TUBE
 0:W/O Locating peg
 1:With Locating peg

Number of Contacts
 Straight

Contact Plating

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ" F	
10μ" E 30μ" J	
◎Duplex plating:	
flash K 5μ" M	
15μ" P 10μ" N	
30μ" U	
◎Standard: B	
◎Prefix "V" means lead free plating.	

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper Alloy
 Insulator Material: High Temperature plastic,UL 94V-0

Finish: Tin,Gold plated
 ◎Standard: Gold flash all over
 Recommended PCB Layout (PCB TOLERANCE ±0.05)


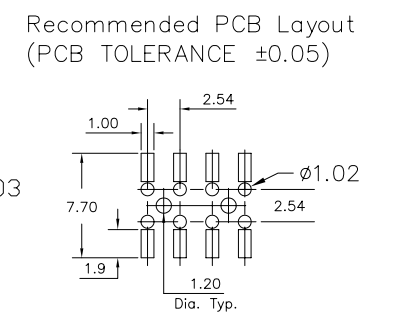


Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

Rev.	ECN Number	Description	Drawn	Date
10	ECR-560012	修正 DIM A,B尺寸	陳顯鑫	06/03 05'
11	EC2-570082	修正規格說明	詹益東	07/14 05'
12	ECR-590076	新增4PIN有導示意圖	陳顯鑫	09/28 05'

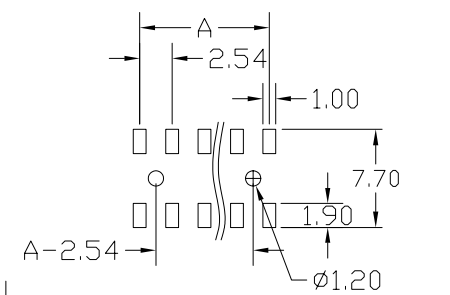

GENERAL TOLERANCE		SCALE	ORIGINAL DRAWN	DATE
XX. ± 0.50	XXX. ±	1=1	陳美竹	08/26 03'
X. ± 0.30	.XXX ±	UNIT	林錫錦	DATE
.X ± 0.25	.X° ± 4°	MM	林錫錦	09/28 05'
.XX ± 0.20	.X° ± 4°	SIZE A4	林錫錦	DATE
				09/28 05'

DWG. NO.	TITLE	REV.
3-16	2.54X2.54mm SMD SOCKET (成品規格圖)	12
F:\DWG\CDWG\PGF\PGFZMOF.DWG		
PARTS NO. SPGFZ-XXS-X-X-*		SHEET 1/1