


No. of Contacts	DIMENSIONS		
	A	B	C
04	2.54	11.68	7.82
06	5.08	14.22	10.36
08	7.62	16.76	12.90
10	10.16	19.30	15.44
12	12.70	21.84	17.98
14	15.24	24.38	20.52
16	17.78	26.92	23.06
18	20.32	29.46	25.60
20	22.86	32.00	28.14
22	25.40	34.54	30.68
24	27.94	37.08	33.22
26	33.02	42.16	38.30
28	33.02	42.16	38.30
30	35.56	44.70	40.84
32	38.10	47.24	43.38
34	40.64	49.78	45.92
36	43.18	52.32	48.46
38	45.72	54.86	51.00
40	48.26	57.40	53.54
44	53.34	62.48	58.62
48	58.42	67.56	63.70
50	60.96	70.10	66.24
60	73.66	82.80	78.94
62	76.20	85.34	81.48
64	78.74	87.88	84.02
72	88.90	98.04	94.18
80	99.06	108.20	104.34
86	106.68	115.82	111.96
98	121.92	131.06	127.20
100	124.46	133.60	129.74
108	134.62	143.76	139.90
120	149.86	159.00	155.14

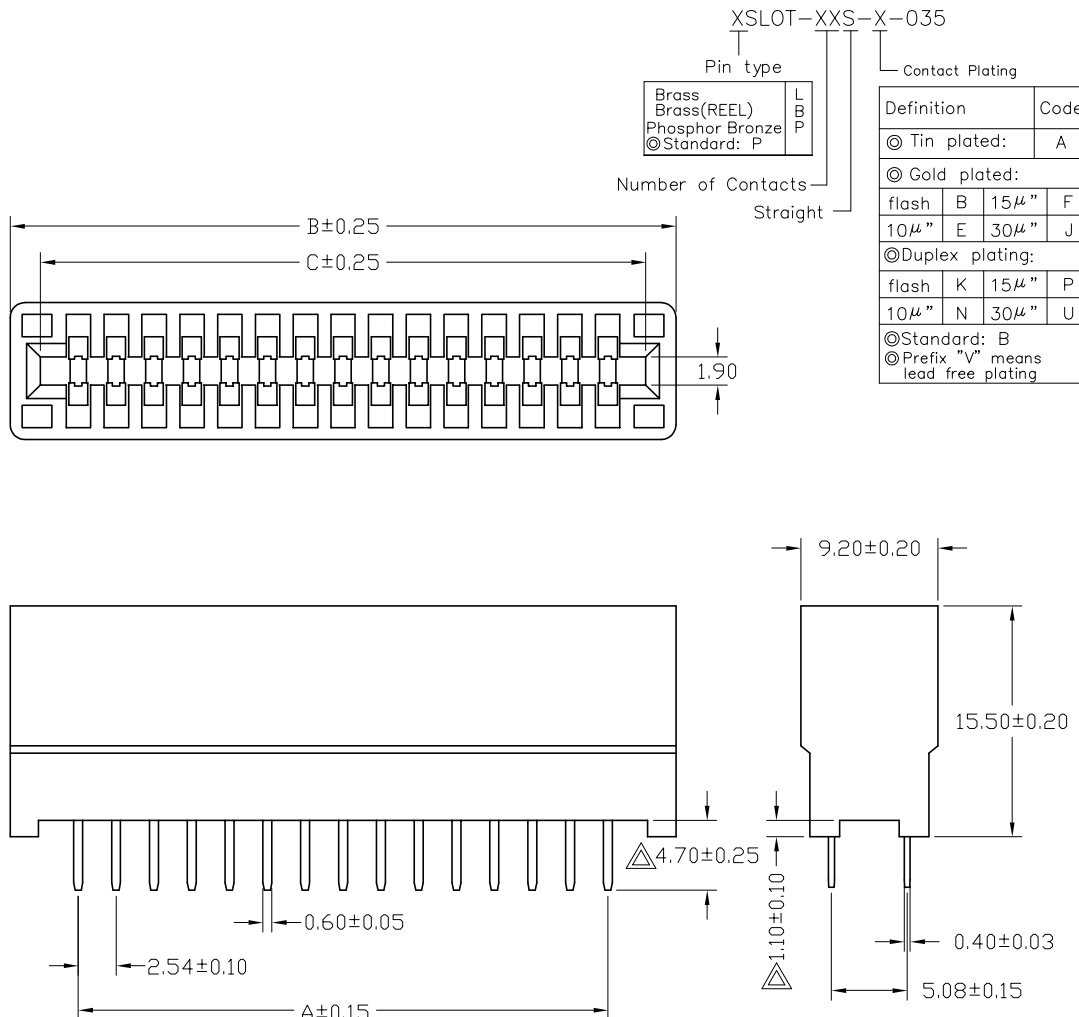

**SPECIFICATIONS**

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohms max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Contact Material: Phosphor bronze or Brass  
 Insulator Material: Polyester, UL 94V-0  
 ◎Standard: P.B.T

Finish: Gold or Duplex plated  
 ◎Standard: Duplex plating  
 ◎Note: Duplex plating: gold plated on contact area, Tin on solder area

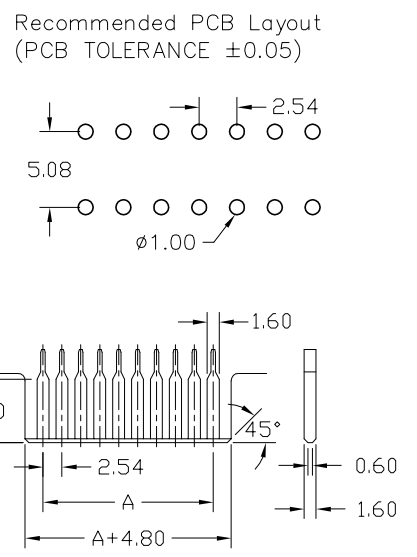


Diagram	Molding description	Rev.	ECN Number	Description	Drawn	Date
○	mass production & assemble mold	2	EC2-490157	圖面新增電鍍碼選擇+修改料號 X SLOT-XXS-K-035->X SLOT-XXS-X-035	洪銀雯	09/09/04'
◎	sample & assemble mold	3	ECR-4C0050	圖面新增14PIN	陳顯鑫	12/27 04'
⊕	mass production & fix mold	4	ECR-540005	圖面尺寸修正	陳美竹	04/04 05'
⊗	sample & fix mold					



GENERAL TOLERANCE		SCALE 1=1	ORIGINAL DRAWN 王佩云	DATE 05/23/03'	DWG. NO. X-XX	TITLE 2.54X2.54mm CARD EDGE SOCKET (成品規格圖)	REV. 4
XX. ± 0.50	XXX. ±	UNIT MM	CHECK 江坤容	DATE 04/04 05'			PARTS NO. F:\DWG\CDWG\SLOT\SLOTS0B.DWG
X. ± 0.30	.XXX ±	SIZE A4	APPROVE 林錫錦	DATE 04/04 05'	X SLOT-XXS-X-035		
.X ± 0.25	.X. ± 4'						
.XX ± 0.20	.X. ± 4'						