


版次	ECN 编码	描述		设计/日期
1	EL21030028	初版发行		苏琴_2021/03/13
		改前	改后	

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
 - Materials:
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Black.
Contact material: Copper alloy.
 - Current Rating: 1A per pin.
 - Voltage Rating: 30V AC.
 - Working Temperature: -40°C~+105°C.
 - Harmful material should be compliant to doc. "EI-0005" standards.
 - Product number matrix:
BCAEA014RB00

PAD+REEL

Plating Code:
Surface area: Plating gold flash.
The bottom layer: Plating Ni 50u" Min.

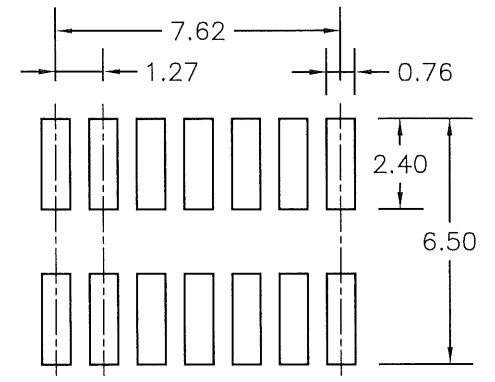

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	TOLERANCE TABLE		SCALE 5:1	DRAWN 苏琴	DATE 2021/03/13	DWG. NO. 600-0000-2210	TITLE CUSTOMER DRAWING	REV. 1
	X. ± 0.30	X.° ± 3°	UNIT mm	CHECK 苏琴	DATE 2021/03/13			PARTS NO.(INTENDED USE) BCAEA014RB00
	.X ± 0.25	.X° ± 2°	SIZE A4	APPROVE 苏琴	DATE 2021/03/13			
	.XX ± 0.20							

A B C D E