


**SPECIFICATIONS**

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Max Processing Temp: 230° for 30 seconds  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon-6T  
 Finish: Tin, Gold or Duplex plated  
 © Standard: Duplex plated  
 © Note: Duplex plating: gold plated on contact area, Tin on solder area



PRG-XXS-X-X-S01  
 0: W/O Locating peg  
 1: With Locating peg  
 Straight

Contact Plating

Definition	Code
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
© Standard: B	

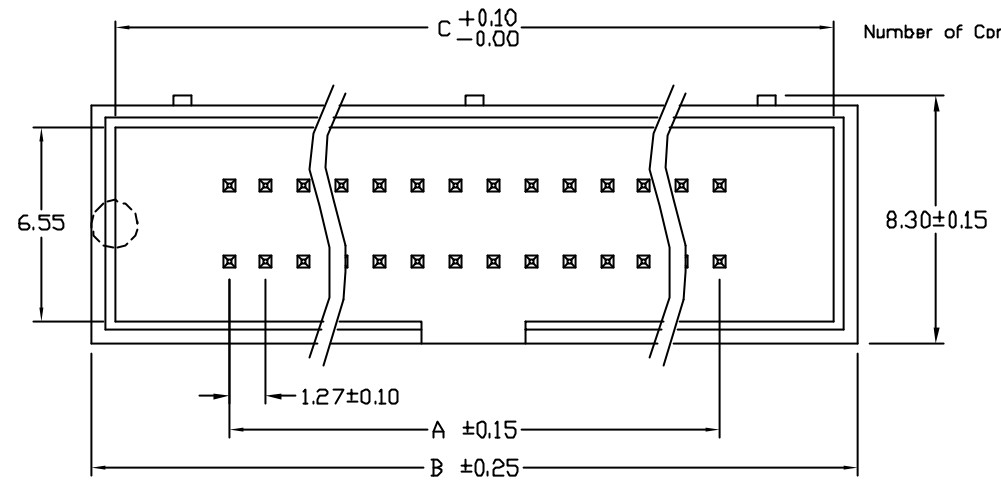

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

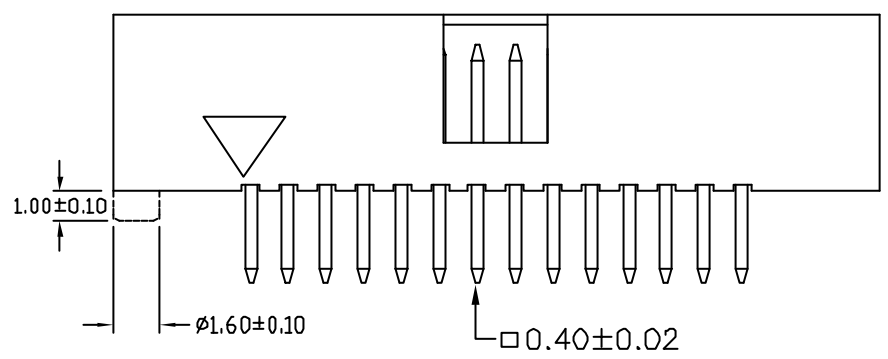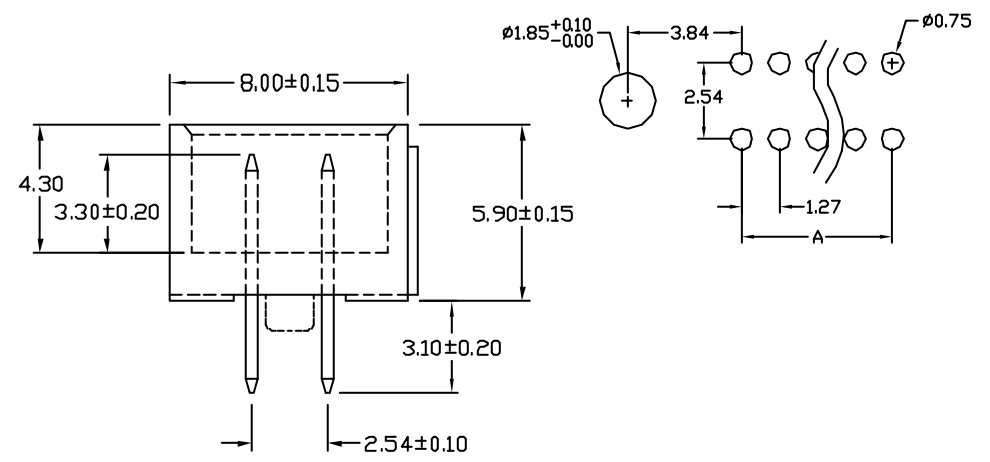

No. of Contacts	DIMENSIONS			REMARK w/o peg	REMARK Peg
	A	B	C		
6B	41.91	51.18	49.58	⊕	⊕
8D	49.53	58.80	57.20	⊕	⊕
10D	62.23	71.50	69.80	⊕	⊕

Rev.	ECN Number	Description	Drawn	Date
2	DOC9304497	新增 68 PIN	林秋蘭	04/26-04'



GENERAL TOLERANCE		SCALE
XX. ± 0.50	XXX. ±	1=1
X. ± 0.30	.XXX ±	UNIT MM
.X ± 0.25	.X* ± 4°	SIZE A4/X
.XX ± 0.20	.X* ± 4°	

ORIGINAL DRAWN	江坤容	DATE	06/20-03'
CHECK	江坤容	DATE	04/26-04'
APPROVE	林錫錦	DATE	04/26-04'

DWG. NO.	IX-XX	TITLE	1.27X2.54mm BOX HEADER	REV.	2
F: \DWG\CDWG\PRG\PRGS0A.DWG				SHEET	1/1
PARTS NO.	PRG-XXS-X-X-S01				