
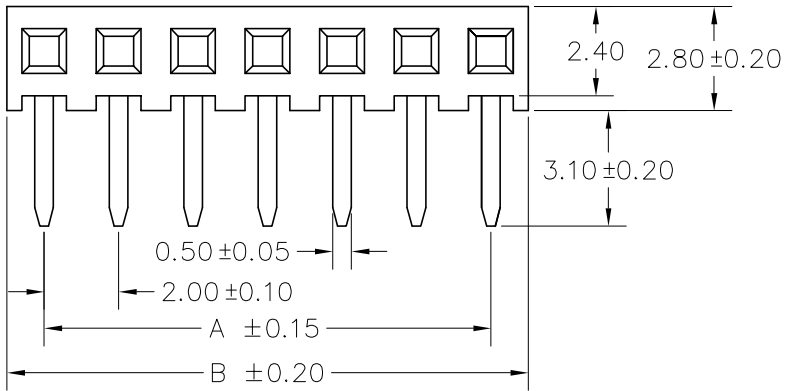


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
2	2.00	4.50	○
3	4.00	6.50	○
4	6.00	8.50	○
5	8.00	10.50	○
6	10.00	12.50	○
7	12.00	14.50	○
8	14.00	16.50	○
9	16.00	18.50	○
10	18.00	20.50	○
11	20.00	22.50	○
12	22.00	24.50	○
13	24.00	26.50	○
14	26.00	28.50	○
15	28.00	30.50	○
16	30.00	32.50	○
17	32.00	34.50	○
18	34.00	36.50	○
19	36.00	38.50	○
20	38.00	40.50	○
21	40.00	42.50	○
22	42.00	44.50	○
23	44.00	46.50	○
24	46.00	48.50	○
25	48.00	50.50	○
26	50.00	52.50	○
27	52.00	54.50	○
28	54.00	56.50	○

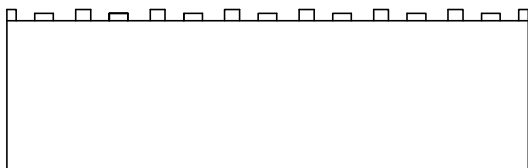

PTFY-XXR-X-031
 Number of Contacts — Right Angle — Contact Plating
 Pin Length mm

Definition	Code	
◎ Tin plated:	A	
◎ Gold plated:		
flash	B	15μ" F
10μ"	E	30μ" J
◎ Duplex plating:		
flash	K	15μ" P
10μ"	N	30μ" U
◎ Standard:	B	
◎ Prefix "V" means	lead free plating.	

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: High Temperature Thermoplastic, UL 94V-0(Nylon-6T)
 Color : Black
 Finish: Tin, Gold or Duplex plated
 ◎ Standard: Gold flash all over
 ◎ Note: Duplex plating: gold plated on contact area, Tin on solder area

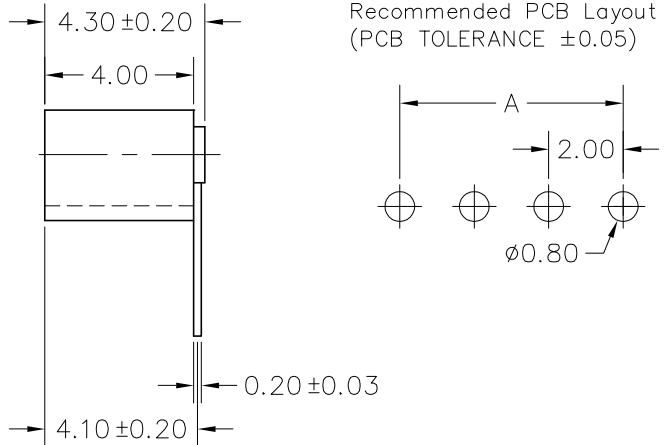


Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

Rev.	ECN Number	Description	Drawn	Date
2	EC2-4A0569	新增環保電鍍	陳美竹	11/02 04'

 Plastron Precision Co., Ltd. 樟翔精密股份有限公司	GENERAL TOLERANCE		SCALE 1=1	ORIGINAL DRAWN 江坤容	DATE 05/07 02'	DWG. NO. X-XX F:\DWG\CDWG\PTF\PTFYR0A.DWG PARTS NO. PTFY-XXR-X-031 TITLE 2.0mm SOCKET (成品規格圖) REV. 2 SHEET 1/1
	XX. ± 0.50	XXX. ±	UNIT MM	CHECK 江坤容	DATE 11/02 04'	
	X. ± 0.30	.XXX ±	SIZE A4/4	APPROVE 林錫錦	DATE 11/02 04'	
	.X ± 0.25	X. ± 4'				
.XX ± 0.20	.X ± 4'					