


No. of Contacts	DIMENSIONS	
	A	B
2		2.54
4	2.54	5.08
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90
72	88.90	91.44
74	91.44	93.98
76	93.98	96.52
78	96.52	99.06
80	99.06	101.60

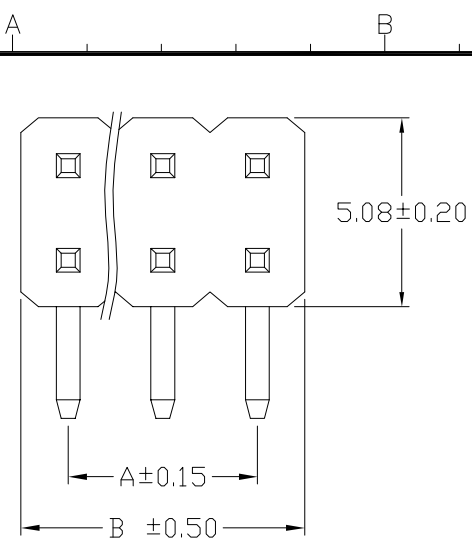

Pin type
 Brass
 Brass (Reel)
 Phosphor Bronze
 © Standard: L

Number of Contacts
 Right Angle
 H
 R0 0.32mm
 R1 1.5mm
 R2 2.0mm

XHZ-XXRX-X-C/D-*

NULL: Thermoplastic(P.B.T)
 F: High Temperature
 Thermoplastic(Nylon-6T)


Contact Plating

Definition	Code
© Tin plated:	A
© Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
© Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
© Standard: B	
© Prefix "V" means lead free plating.	


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: Thermoplastic, UL 94V-0
 Color: Black

Finish: Tin, Gold or Duplex plated
 © Standard: Gold flash all over
 © Note:
 Duplex plating: gold plated on contact area,
 Tin on solder area

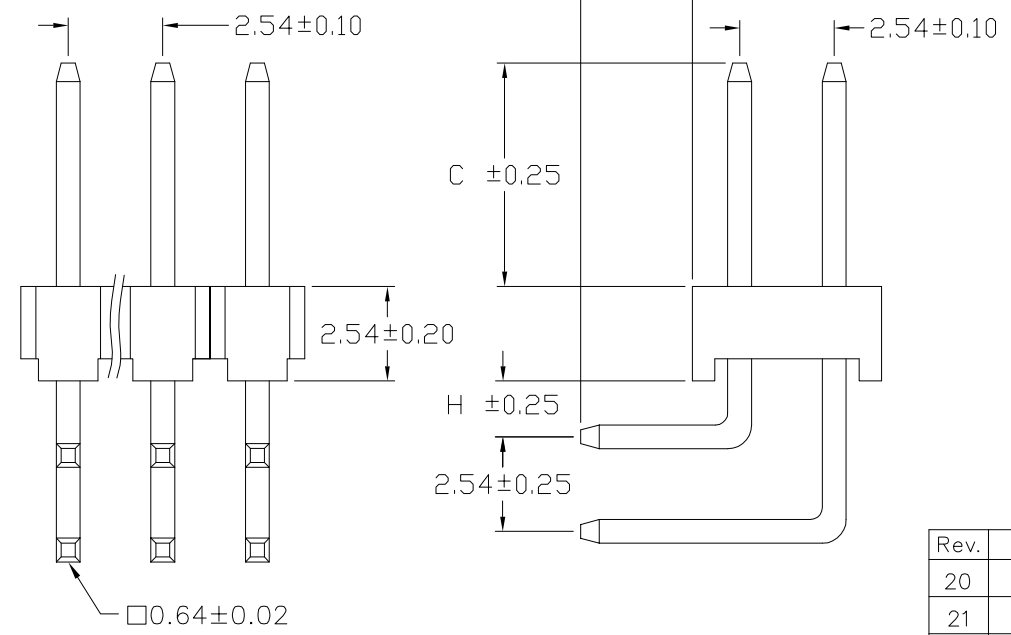

© For illustration purpose the XHZ-XXRX-X-060/030 was shown
 Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

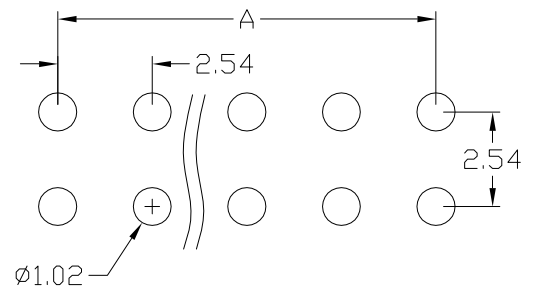

Rev.	ECN Number	Description	Drawn	Date
20	ECR-520120	補 02 PIN	陳美竹	03/10 05'
21	EC2-550045	新增規格 XHZ-XXRX-X-048/033-*	陳美竹	05/05 05'
22	EC2-580032	新增規格 XHZ-XXRX-X-081/031-*	詹益東	08/04 05'



GENERAL TOLERANCE	SCALE 1=1	ORIGINAL DRAWN 陳美竹	DATE 03'/09/23
XX. ± 0.50	UNIT MM	CHECK 林錫錦	DATE 08/04 05'
X. ± 0.30	SIZE A4/5	APPROVE 林錫錦	DATE 08/04 05'
.X ± 0.25			
.XX ± 0.20			

DWG. NO. 3-42	TITLE 2.54X2.54mm HEADER (成品規格圖)	REV. 22
F:\DWG\CDWG\HZ\HZR0G.DWG		SHEET 1/2
PARTS NO. XHZ-XXRX-X-C/D-*		