
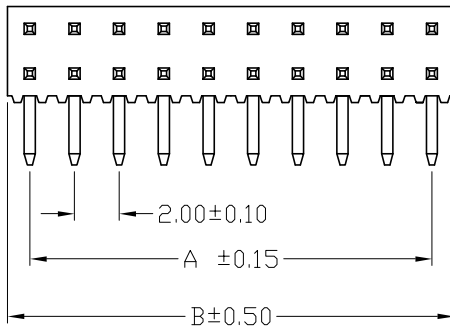


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.00	4.00	○
6	4.00	6.00	○
8	6.00	8.00	○
10	8.00	10.00	○
12	10.00	12.00	○
14	12.00	14.00	○
16	14.00	16.00	○
18	16.00	18.00	○
20	18.00	20.00	○
22	20.00	22.00	○
24	22.00	24.00	○
26	24.00	26.00	○
28	26.00	28.00	○
30	28.00	30.00	○
32	30.00	32.00	○
34	32.00	34.00	○
36	34.00	36.00	○
38	36.00	38.00	○
40	38.00	40.00	○
42	40.00	42.00	○
44	42.00	44.00	○
46	44.00	46.00	○
48	46.00	48.00	○
50	48.00	50.00	○
52	50.00	52.00	○
54	52.00	54.00	○
56	54.00	56.00	○
58	56.00	58.00	○
60	58.00	60.00	○
62	60.00	62.00	○
64	62.00	64.00	○
66	64.00	66.00	○
68	66.00	68.00	○
70	68.00	70.00	○
72	70.00	72.00	○
74	72.00	74.00	○
76	74.00	76.00	○
78	76.00	78.00	○
80	78.00	80.00	○

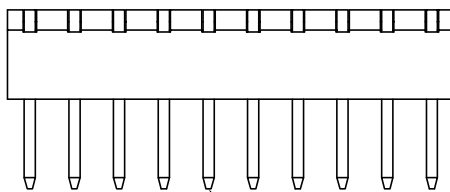

XTT-XXR-X-C/D(-G)

Pin type
 Brass
 Brass(Reel)
 Phosphor Bronze
 ◎Standard: P

L
B
P

TUBE: FOR 8PIN

Contact Plating

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
◎Standard: K	
Prefix "V" means lead free plating.	

Number of Contacts
Right Angle



SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Brass or Phosphor bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color: Black

Finish: Tin, Gold or Duplex plated

◎ Note:
 Duplex plating: gold plated on contact area, Tin on solder area
 ◎ For illustration purpose the XTT-XXR-X-055/030 was shown

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

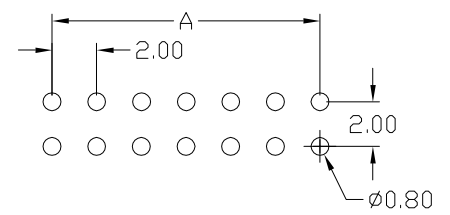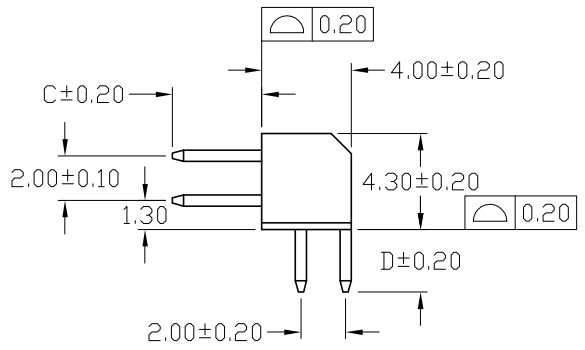

Rev.	ECN Number	Description	Drawn	Date
6	ECR-530068	尺寸公差修改	陳美竹	03/11'05
7	EC2-530561	新增包裝代碼	陳賜農	03/24'05
8	EC2-540568	新增 XTT-XXR-X-028/028	陳美竹	04/26 05'



GENERAL TOLERANCE		SCALE
XX. ± 0.50	XXX. ±	1=1
X. ± 0.30	.XXX ±	UNIT
.X ± 0.25	.X* ± 4*	MM
.XX ± 0.20	.X* ± 4*	SIZE

SIZE A4/3

ORIGINAL DRAWN 林秋蘭
 CHECK 江坤容
 APPROVE 林錫錦

DATE 06/24 04'
 DATE 04/26 05'
 DATE 04/26 05'

DWG. NO. 2-19
 F:\DWG\CDWG\TT\XTTR1Y.DWG
 PARTS NO. XTT-XXR-X-C/D(-G)

TITLE
 2.0X2.0mm
 HEADER
 (成品規格圖)

REV. 8
 SHEET 1/2