


No. of Contacts	DIMENSIONS		S1·S3 S6·S7	S2·S4 S5
	A	B		
2	1.27	2.54	○	○
3	2.54	3.81	○	○
4	3.81	5.08	○	○
5	5.08	6.35	○	○
6	6.35	7.62	○	○
7	7.62	8.89	○	○
8	8.89	10.16	○	○
9	10.16	11.43	○	○
10	11.43	12.70	○	○
11	12.70	13.97	○	○
12	13.97	15.24	○	○
13	15.24	16.51	○	○
14	16.51	17.78	○	○
15	17.78	19.05	○	○
16	19.05	20.32	○	○
17	20.32	21.59	○	○
18	21.59	22.86	○	○
19	22.86	24.13	○	○
20	24.13	25.40	○	○
21	25.40	26.67	○	○
22	26.67	27.94	○	○
23	27.94	29.21	○	○
24	29.21	30.48	○	○
25	30.48	31.75	○	○
26	31.75	33.02	○	○
27	33.02	34.29	○	○
28	34.29	35.56	○	○
29	35.56	36.83	○	○
30	36.83	38.10	○	○
31	38.10	39.37	○	○
32	39.37	40.64	○	○
33	40.64	41.91	○	○
34	41.91	43.18	○	○
35	43.18	44.45	○	○
36	44.45	45.72	○	○
37	45.72	46.99	○	○
38	46.99	48.26	○	○
39	48.26	49.53	○	○
40	49.53	50.80	○	○

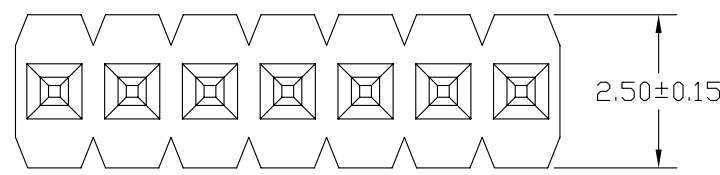

QRY-XXSX-X-C/D

Number of Contacts

Pin Length mm

H	Definition	Code
S1	2.54	
S2	3.00	
S3	1.70	
S4	3.40	
S5	3.95	
S6	2.00	
S7	5.30	



Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B	15μ" F
10μ" E	30μ" J
◎ Duplex plating:	
flash K	15μ" P
10μ" N	30μ" U

◎Standard: K
◎Prefix "V" means lead free plating.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon-6T)
 Color : Black

Finish: Tin, Gold or Duplex plated
 ◎Standard: Duplex plated
 ◎Note: Duplex plating: gold plated on contact area, Tin on solder area

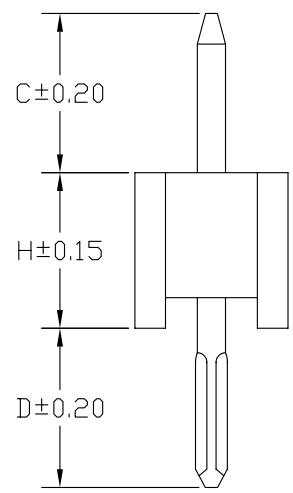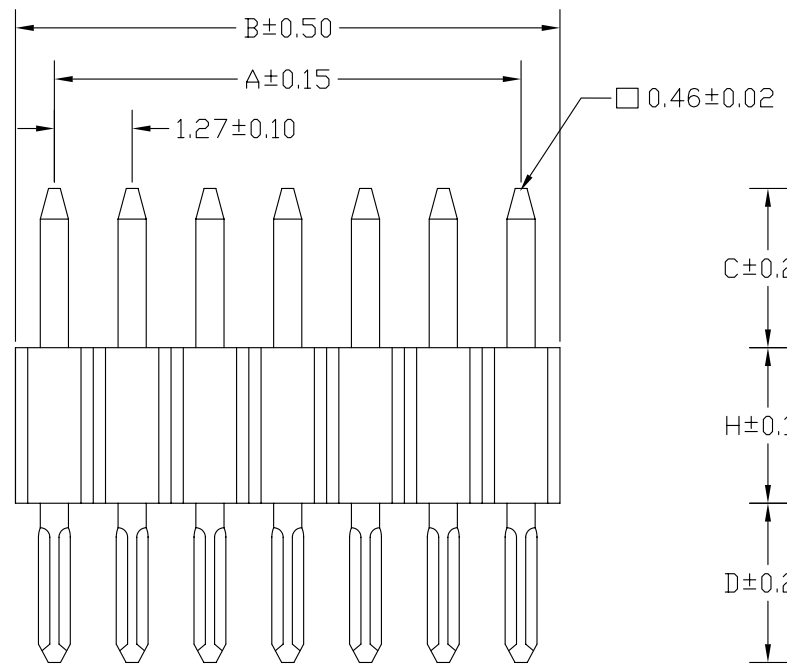

◎ For illustration purpose the QRY-XXS1-X-026/026 was shown

Recommended PCB Layout (PCB TOLERANCE ±0.05)




Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

Rev.	ECN Number	Description	Drawn	Date
13	EC2-570133	新增 新增特殊規格	陳美竹	07/27 05'
14	EC2-570151	QRY-XXSX-X-057/020	詹益東	07/28/05'
15	EC2-570151	QRY-XXSX-X-057/020增加確認符號 0	詹益東	01/18/06'



GENERAL TOLERANCE		SCALE	6=1	ORIGINAL DRAWN	林秋蘭	DATE	05/21 02'
XX. ± 0.50	XXX. ±	UNIT	MM	CHECK	林錫錦	DATE	01/18/06'
X. ± 0.30	.XXX ±	SIZE	A4	APPROVE	林錫錦	DATE	01/18/06'
.X ± 0.25	X.° ± 4°						
.XX ± 0.20	.X° ± 4°						

DWG. NO.	X-XX	TITLE	REV.
F:\DWG\CDWG\RY\RYS00.DWG		1.27mm HEADER (成品規格圖)	15
PARTS NO.	QRY-XXSX-X-C/D		SHEET 1/3